


EL. SWITCHES OR SOCKET-OUTLETS

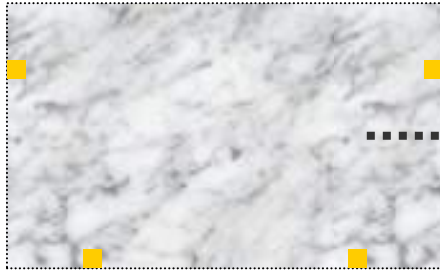

MARBLE HEATING SLAB CABLE

POWER CABLE :
min. 2 x 2,5 mm²

MAINSWITCH
>3 mm contact gap
(2P SWITCH AC 250 V/16A)

ROOM
THERMOSTAT



MARBLE HEATING SLAB CABLE

BROWN

BLUE

ROOM
THERMOSTAT

MAINSWITCH
>3 mm contact gap
(2P SWITCH
AC 250 V/16A)

L

N

POWER-SUPPLY:
AC 240 V 50/60 Hz
min. 2 x 2,5 mm²

contacts number

The marble heating slabs shall never have another voltage than 240 V. An authorized installer must install it according to attached drawings. In the circuit in front of the marble heating slabs there is a 2-pole switch with a contact breaker on at least 3 mm. An authorized installer must also install this.

cca 500 mm

min 300 mm

POWER-SUPPLY:
AC 240 V 50/60 Hz
min. 2 x 2,5 mm²

FLUSH
MOUNTING
BOXES
Ø 60 mm

PVC TUBE Ø 20 mm

